

CAR FRAME SERIES

WLF03, WLF06, WLF10 WLF16, WLF20

EXCELLENCE IN COMPONENTS




CAR FRAME SERIES

WLF03, WLF06, WLF10 WLF16, WLF20

FEATURES

- hydraulic car frame range which complies to EN81-2 specifications
- car frame height can be chosen freely (in mm steps). Maximum car height for standard models is 3550 mm (WLF03, 06, 10) and 3480 mm (WLF16, 20)
- available with progressive and instantaneous safety gears
- suitable for rail head width from 16 and 19 mm
- suspension 1:1 or 2:1, as well as 3:1 or 4:1 (WLF06 and WLF10 only)
- complete range of shaft components for installation available
- interface to cylinders suitable for most common cylinder brands
- easy installation

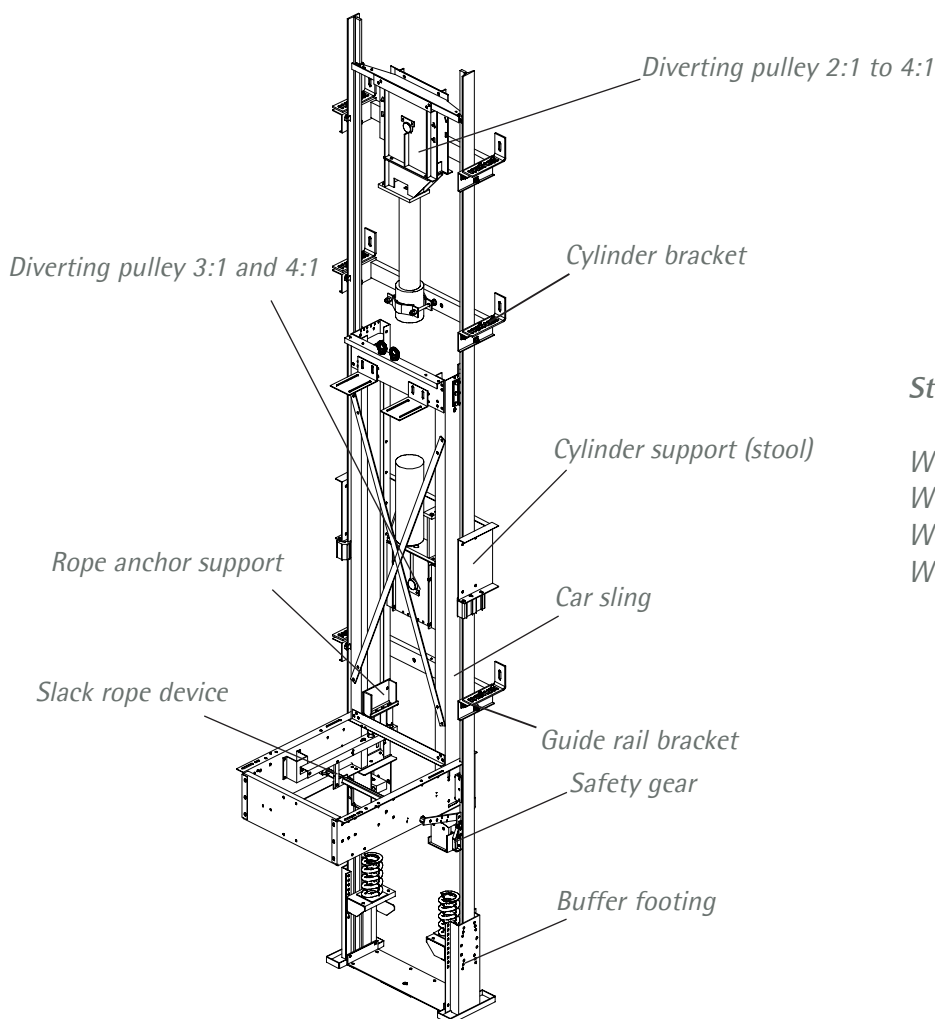

Standard DBG-dimensions:

WLF03: 600 mm
 WLF06/10: 800 mm
 WLF16: 1100 mm
 WLF20: 1500 mm