

*SELCOM® LANDING DOOR*

# Pegasus standard





















EXCELLENCE IN COMPONENTS

SELCOM® LANDING DOOR


# Pegasus standard

PRODUCTION RANGE

POS.	SERIE	LANDING DOORS		CAR DOORS		C.O. mm		C.H. mm	
		TYPE	ILLUSTRATION	TYPE	ILLUSTRATION	Min.	Max.	Min.	Max.
DOOR WITH OPERATOR ABOVE	3201	01/C		02/C		750	1800	2000	NOTE: MAXIMUM CLEAR OPENING HEIGHT 3800 mm. - SUBJECT TO CLEAR OPENING WIDTH
		11/R		12/R		800	1800	2000	
		11/L		12/L		900	2100	2000	
		31/R		32/R		1300	3200	2000	
		31/L		32/L		1800	3200	2000	
		41/C		42/C		600	1400	2000	
		61/C		62/C					
		71/R		72/R					
		71/L		72/L					

SELCOM® CAR DOOR

# Pegasus PLUS

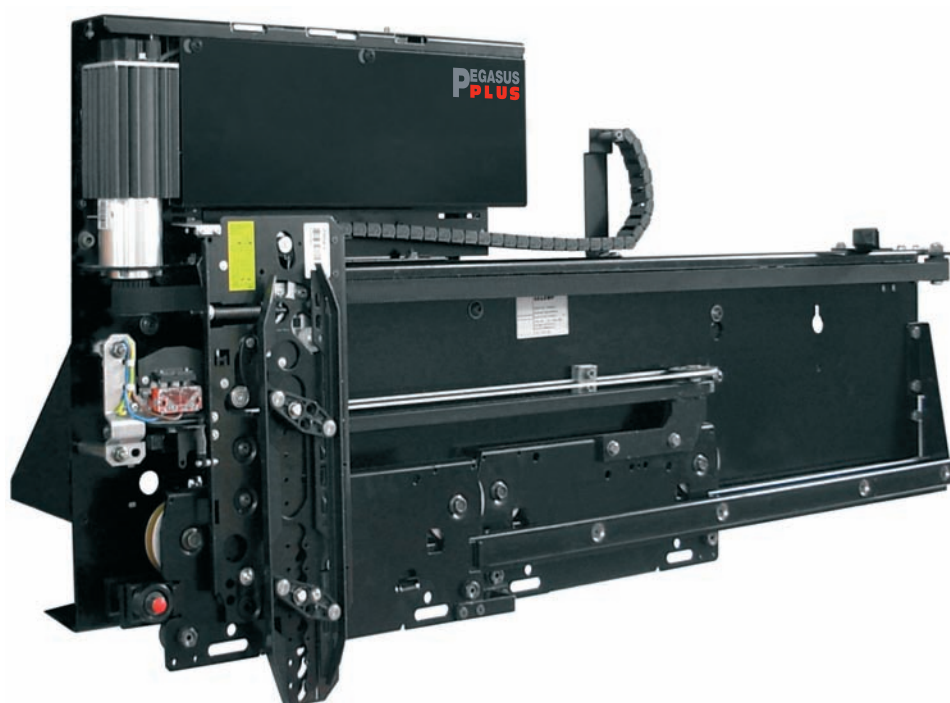

EXCELLENCE IN COMPONENTS


















**Pegasus PLUS, the new heavy duty operator.**

- New coupler with integrated car door lock
- Reinforced mechanics to increase reliability
- Silent operations granted by high quality rollers
- Pre-adjusted & tested for fast & easy installation
- High speed operation with Midi/Supra drives
- 127/230V - 50/60Hz Power input with high tolerance
- 24V DC Power output for safety devices
- Continuous door weight detection
- Open force limitation
- Easy speed selection
- Optional settings for special purposes

SELCOM® CAR DOOR

# Pegasus PLUS

## PRODUCTION RANGE

POS.	SERIE	LANDING DOORS		CAR DOORS		C.O. mm		C.H. mm	
		TYPE	ILLUSTRATION	TYPE	ILLUSTRATION	Min.	Max.	Min.	Max.
DOOR WITH OPERATOR ABOVE	3201	01/C		02/C		750	1800	2000	NOTE: MAXIMUM CLEAR OPENING HEIGHT 3500 mm. - SUBJECT TO CLEAR OPENING WIDTH
		11/R		12/R		800	1800		
		11/L		12/L		900	2100		
		31/R		32/R		1300	3200		
		31/L		32/L		1800	3200		
		41/C		42/C		600	1400		
		61/C		62/C					
		71/R		72/R					
		71/L		72/L	